


# Filter installation & removal

Approximately every 1500 hours (around 2 months), the filter icon  will flash blue slowly, indicating that it's time to replace the filter.


## INSTALLATION & REMOVAL

1. Disconnect the power.
2. Grasp both sides of the front cover and pull to remove.
3. Use the pull tab to remove the old filter.
4. Remove the plastic bag from the new filter, then insert the new filter into the unit, ensuring the pull tab is facing towards you.

*Note: If the timer is on, you will not be able to reset the filter. Cancel the timer by holding the timer icon on the operation panel for 2 seconds before trying to reset the filter.*

## RESET REPLACEMENT REMINDER

To reset the filter replacement prompt, press and hold the filter icon for 3 seconds.

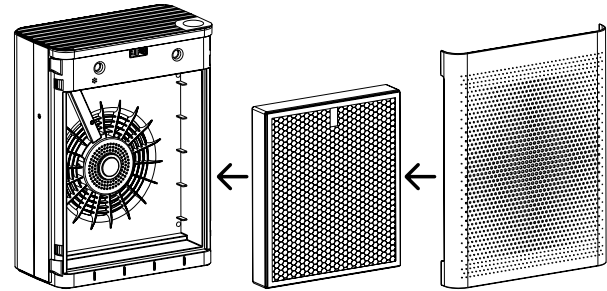

## TIPS

- DO NOT operate without the filter.
- Filters may need to be replaced more frequently if used in an area with heavy air pollution. Replace if filtration effectiveness is diminished.
- Immediately discard used filters.
- DO NOT wash the filter with water.

**Need help?**

435-752-6611

support@verapure.com

verapure.com

